

GIGAVIDEO

wireless sound and vision through walls
and ceilings



Watch DVD images in bed from the player downstairs

Suitable for DVD player, video recorder, satellite receiver, PC, etc.

Control your equipment through walls and ceilings using your own remote control

MARMITEK



GigaVideo40

- Standard audio/video transmitter and receiver.
- Wireless and sharp images and sound.
- Also suitable for PC: send DIVX, DVD or MP3 files to your TV or Stereo in the living room.
- Built-in infrared return channel with separate infrared blaster for transmission of your remote control signal to e.g. the DVD player, Video Recorder or Satellite Receiver. The blaster is connected to the GigaVideo Transmitter.



GigaVideo70

- All the benefits of the GigaVideo40 in a beautiful and compact 'Silver Line' housing.
- Equipped with three small IR-LED's for the transmission of your remote control signal. The LED's are connected to the GigaVideo Transmitter and can be attached (almost invisibly) to the infrared receiver of the A/V source.
- Built-in RF modulator to connect the receiver to the TV without SCART or RCA inputs.
- Comprehensive set of connection materials, such as a SCART doubler, to retain a SCART connection when attaching the transmitter.
- Programmed for the Smart SCART Box to remotely choose between 2 different A/V sources, e.g. the DVD and the video recorder.


MODELS

	GigaVideo40	GigaVideo70	CableLink 75
Wireless image and sound	•	•	•
Extra adapter plugs and cables		•	•
Built-in modulator (channel 36)		•	
IR extenders	1 (blaster)	3	3
Built-in TV-tuner			•
Including remote control			•
Colour	Black	Silver	Black

AVAILABLE ACCESSORIES

- Smart SCART Box. Switch between e.g. the DVD and Video Recorder
- Extra transmitter for the GigaVideo 40
- Extra receiver for the Giga Video40
- Extra transmitter for the GigaVideo70
- Extra receiver for the GigaVideo70
- Xcam2, separate wireless camera. Transmit camera images and sound to your GigaVideo Receiver
- Xcam1, separate wired camera. To be connected to the transmitter
- S-Video to composite video adapter. If you want to use the S-video-out of the source appliance

Transmit both vision and sound as well as the signal of your infrared remote control through walls and ceilings

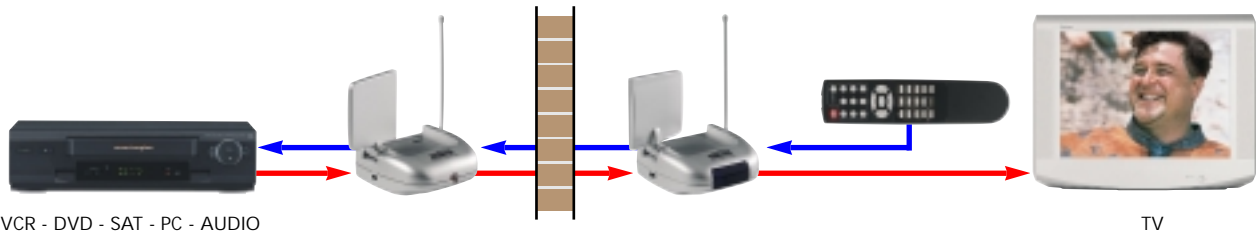

TECHNICAL INFORMATION

GigaVideo40

Power 230VAC/50Hz, 12V DC adaptors (supplied)
 Transmitter and receiver 2.4GHz - 4 channels
 Output 10 mW max.
 Range 15-30m (indoor) or 100m (open field)
 A/V input 2x Audio (stereo)
 1x Video
 Set content Transmitter, receiver, power adapters, A/V cables, SCART/RCA, IR blaster, user manual NL/UK/D/F

GigaVideo70

Power 230 VAC/50Hz, 9V and 12V DC adaptor (supplied)
 Transmitter and receiver 2.4GHz - 4 channels
 Output 10 mW max.
 Range 15-30m (indoor) or 100m (open field)
 A/V input 2x Audio (stereo)
 1x Video
 Set content Transmitter, receiver, power adapters, RCA/Mini DIN cable, SCART adapter, RCA/RCA cable + SCART doubler, stereo RCA/3.5 mm jack for PC soundcard, IR extender cable with 3 eyelets, user manual NL/UK/D/F